



Cinelite 800W

SPECIFICATIONS

Identity No.	L00800TO
	L0080ATO (with Acc. Holder)
Capacity	800W
Voltage	240V
Lamp Type	P2/13 800W 230V
Color Temp.	3200K
Lamp Holder	R7s
Stirrup	Ø16mm (5/8 in.) Socket
Class	1
Max. Surface Temp.	220 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	1.5m
Min. Distance to Flammable Object	0.5m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	1.5kg

Cinelite 800W

LAMPHEAD CONTENTS

- Lamp Housing without Bulb # (purple grey)
- 4-leaf Rotatable Barndoor with Safety Wire
- Wire Guard
- In-Line Switch
- Inlet Cable 3m (10 ft.)
- Accessory Holder
- Stirrup with Ø16mm (5/8 in.) Socket

Requires Lamp Bulb

ACCESSORIES

4-leaf Rotatable Barndoor

Set of 4 Scrims Ø191mm (7-1/2 in.) :

Full Single, Full Double, Half Single, Half Double



Scrim Bag

Accessory Holder

Safety Wire (for barndoor)

PHOTOMETRIC DATA

DIMENSIONS (mm)

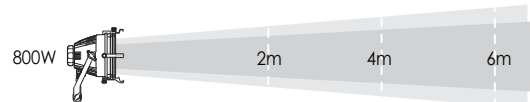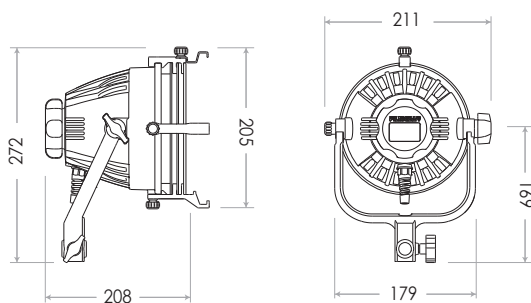

Spot (42°)			
Lux	6747	1687	750
Beam Ø	1.54 m	3.07 m	4.61 m
Flood (89°)			
Lux	2081	520	231
Beam Ø	3.93 m	7.86 m	11.79 m