

Daylight Fresnel 4kW/2.5kW SE

LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø300mm (11-3/4 in.) Fresnel Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot


Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Fresnel 4kW/2.5kW SE


SPECIFICATIONS

Identity No.	L04025DS
Capacity	4,000W / 2,500W
Lamp Bulb Voltage	200V / 115V
Fresnel Lens	Ø300mm (11-3/4 in.)
Lamp Type	MSR 4000HR or HMI 4000W/SE
	MSR 2500/HR or HMI 2500W/SE
Color Temp.	5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	160 °C / 150 °C
Min. Distance to Illuminated Object	10m / 8m
Min. Distance to Flammable Object	1.2m / 1m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	22.6kg
Weight (with barndoor)	25.1kg

PHOTOMETRIC DATA



	5m	10m	15m
Spot (6°)			
Lux	75144	18786	8349
Beam Ø	0.52 m	1.05 m	1.57 m
Flood (64°)			
Lux	6961	1740	773
Beam Ø	6.25 m	12.50 m	18.75 m




	5m	10m	15m
Spot (6°)			
Lux	54000	14000	6300
Beam Ø	0.52 m	1.05 m	1.57 m
Flood (64°)			
Lux	4500	1100	520
Beam Ø	6.25 m	12.50 m	18.75 m

ACCESSORIES

- Electronic Ballast V3 : 4kW/2.5kW
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Filter Frame
- Set of 4 Scrims Ø394mm (15-1/2 in.) :
  Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)

DIMENSIONS (mm)

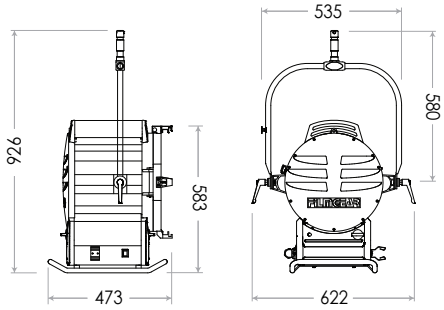

FILM GEAR INT. reserves the right to change or alter any of the items detailed on this page, to increase or improve manufacturing techniques without prior notice. @ 20250113

Film Gear (International) Ltd. Unit A, 3/F, Seapower Industrial Centre, 177 Hoi Bun Road, Kwun Tong, Kln., Hong Kong (852) 2794 3608 info@filmgear.net
Film Gear USA Group 9528 Rush Street, Suite A South El Monte, CA 91733, U.S.A 1-323-780-8880 joanna@filmgearusa.com
www.filmgear.net