

**Daylight Par
Faceted
F9K
FACETED**



LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø500mm UV Protective Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot


Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Par Faceted F9k

SPECIFICATIONS

Identity No.	L0900FPS
Capacity	9,000W
Lamp Bulb Voltage	160V
UV Protective Lens	Ø500mm
Lamp Type	HMI 9000W/SE
Color Temp.	5600K
Lamp Holder	GX38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	220 °C
Min. Distance to Illuminated Object	12m
Min. Distance to Flammable Object	2m
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	35kg
Weight (with barndoor)	40kg

PHOTOMETRIC DATA

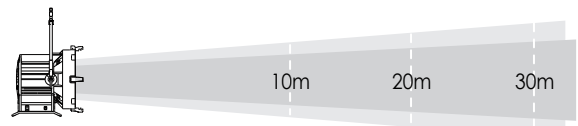

9kW					
Spot	Lux	51783	12946	5754	
15°	Beam Ø	2.63 m	5.27 m	7.9 m	
Flood	Lux	7775	1944	864	
54°	Beam Ø	10.19 m	20.38 m	30.57 m	

ACCESSORIES

- Electronic Ballast V3 : 9kW/6kW
- Lamphead to Ballast Cable : 10m (33 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 4 Scrimms Ø568mm :
 - Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)
- Spill Ring

DIMENSIONS (mm)

