

**Daylight Par
Faceted
F1,8k
FACETED**



LAMPHEAD CONTENTS

- Lamp Housing without Bulb (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø265mm UV Protective Lens
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm (1-1/8 in.) Spigot


Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb

Daylight Par Faceted F1,8k

SPECIFICATIONS

Identity No.	L0180FPS
Capacity	1,800W
Lamp Bulb Voltage	140V
UV Protective Lens	Ø265 mm
Lamp Type	HMI 1800W/SE
Color Temp.	5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	160 °C
Min. Distance to Illuminated Object	4.5m
Min. Distance to Flammable Object	1m
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	12kg
Weight (with barndoor)	14kg

PHOTOMETRIC DATA

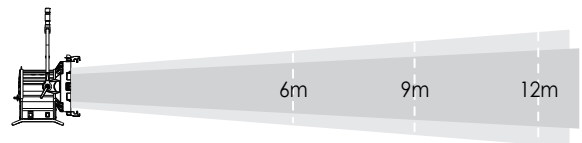

1800W				
Spot	Lux	19000	9000	5000
17.1°	Beam Ø	1.80 m	2.57 m	3.47 m
Flood				
73.7°	Beam Ø	9.00 m	13.50 m	18.00 m

ACCESSORIES

- Electronic Ballast V3 : 1.8kW/1.2kW/575W
- Lamphead to Ballast Cable : 7m (23 ft.) or 15m (49 ft.)
- 4-leaf Rotatable Barndoor
- Set of 4 Scrimms Ø330mm :
 - Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)
- Spill Ring

DIMENSIONS (mm)

