




# Apollo 150B

(Bi-Color)

## LAMPHEAD CONTENTS

- Lamp Housing
- 4-leaf Rotatable Barndoor with Safety Wire
- M.O. Stirrup with Ø28mm / Ø16mm Combo Spigot
- P.O. Stirrup with Ø28mm (1-1/8 in.) Spigot
- AC Cable

## DIMENSIONS (mm)

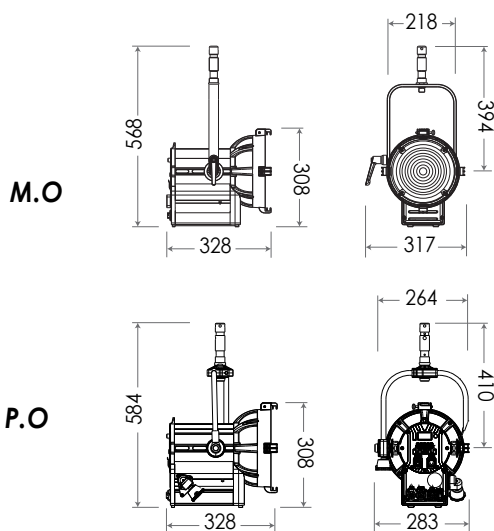

## APOLLO 150B (Bi-Color)

### SPECIFICATIONS

Identity No.	L0015LFB (M.O.) LP015LFB (P.O.)
Max. Capacity	150W
Voltage	100 - 240V AC, 22-36V DC
Frequency	50Hz / 60Hz
Current	0.7A @220V AC 6.2A @24V DC
Fresnel Lens	Ø175mm
Color Temp.	2700K - 6000K
CRI	Average >95
TLCI	Average >95
Dimming Range	0-100%
Control Signal	DMX / RDM
Communication	DMX XLR-5
DMX Channel	3 or 5
LED Lifetime	30,000 Hrs (Estimated)
M.O. Stirrup	Ø28mm / Ø16mm Combo Spigot
P.O. Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C
Max. Ambient Temp.	45 °C
Operating Range	+45° ~ 0° ~ -45°
Weight (Lamphead)	5kg (M.O.) 6kg (P.O.)


### ACCESSORIES

- 4-leaf Rotatable Barndoor
- Filter Frame
- Safety Wire (for barndoor)
- Safety Cable (for lamphead)

### PHOTOMETRIC DATA

		2m	3m	4m	5m
<b>5600K</b>	Spot Lux	25725	11433	6431	4116
	15° Beam Ø	0.53m	0.79m	1.05m	1.32m
	Flood Lux	5250	2333	1313	840
	55° Beam Ø	2.08m	3.12m	4.16m	5.21m
<b>3200K</b>	Spot Lux	19469	8653	4867	3115
	15° Beam Ø	0.53m	0.79m	1.05m	1.32m
	Flood Lux	4306	1913	1077	689
	55° Beam Ø	2.08m	3.12m	4.16m	5.21m


### SPECTRUM

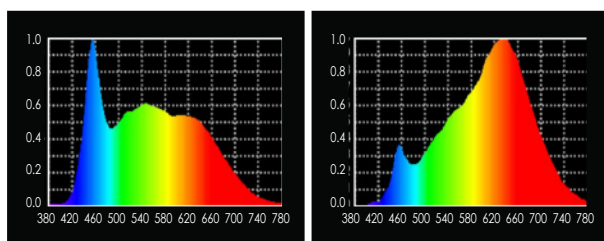

5600K

3200K

### HISTOGRAM

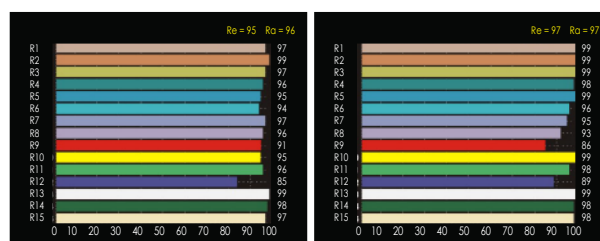

5600K

3200K