Image 300B
(25°-50°)

IMAGE 300B (25°-50°)

SPECIFICATIONS

Identity No.	L302550PZB
Max. Capacity	300W
Voltage	100 - 240V AC 50Hz / 60Hz
	22 - 36V DC
Current	1.4A @220V AC
	12.5A @24V DC
Color Temp.	2700K - 6000K
CRI	Average >95
TLCI	Average >95
Beam Angle	25°-50°
Dimming Range	0-100%
Control Signal	DMX 512
DMX Channel	3 or 5
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60°C
Max. Ambient Temp.	45°C
Operation Range	+45° ~ 0° ~ -45°
Weight (with Barrel)	12kg
Weight (Lamphead)	8.5kg

LAMPHEAD CONTENTS

- Lamp Housing
- Barrel
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- Set of 4 Cutters
- AC Cable

ACCESSORIES

Hook Clamp
Iris
Gobo Adapter
Safety Cable (for lamphead)

* Pole Operated Optional

PHOTOMETRIC DATA

			5m	6m	7m
5600K	25°	Lux	3206	2226	1688
		Beam Ø	2.22m	2.66m	3.10m
	50°	Lux	1059	735	549
		Beam Ø	4.66m	5.60m	6.53m
3200K	25°	Lux	2365	1642	1248
		Beam Ø	2.22m	2.66m	3.10m
	50°	Lux	780	542	411
		Beam Ø	4.66m	5.60m	6.53m

DIMENSIONS (mm)

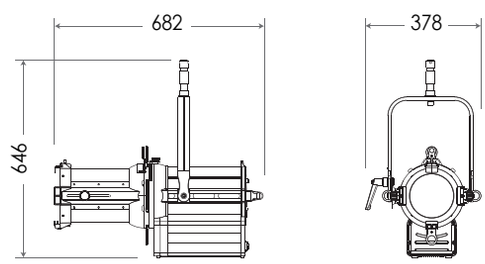

SPECTRUM

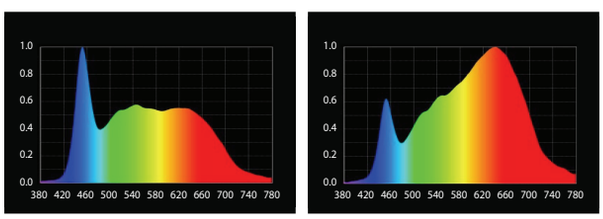

5600K 3200K

HISTOGRAM

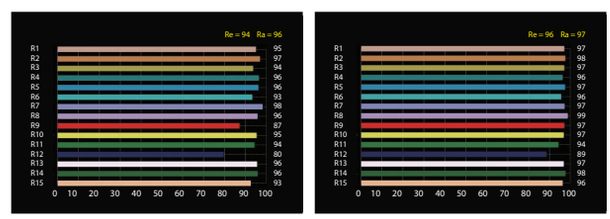

5600K 3200K

FILM GEAR INT. reserves the right to change or alter any of the items detailed on this page, to increase or improve manufacturing techniques without prior notice. @ 20250701