




# Image 300B (19°)

## LAMPHEAD CONTENTS


- Lamp Housing
- Barrel
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- Set of 4 Cutters
- AC Cable

## PHOTOMETRIC DATA




Color Temp.	Beam Angle	7m	9m	10m
5600K	19°	Lux 2923	1768	1432
		Beam Ø 2.34m	3.01m	3.35m
3200K	19°	Lux 1996	1207	978
		Beam Ø 2.34m	3.01m	3.35m

## SPECTRUM



5600K



3200K

## IMAGE 300B (19°)

### SPECIFICATIONS

Identity No.	L300019PAB
Max. Capacity	300W
Voltage	100 - 240V AC 50Hz / 60Hz 22 - 36V DC
Current	1.4A @220V AC 12.5A @24V DC
Color Temp.	2700K - 6000K
CRI	Average >95
TLCI	Average >95
Beam Angle	19°
Dimming Range	0-100%
Control Signal	DMX 512
Communication	DMX XLR-5
DMX Channel	3 or 5
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60°C
Max. Ambient Temp.	45°C
Operation Range	+45° ~ 0° ~ -45°
Weight (with Barrel)	13.5kg
Weight (Lamphead)	8.5kg

### ACCESSORIES

Hook Clamp


Iris

Gobo Adapter


Safety Cable (for lamphead)

\* Pole Operated Optional


### DIMENSIONS (mm)

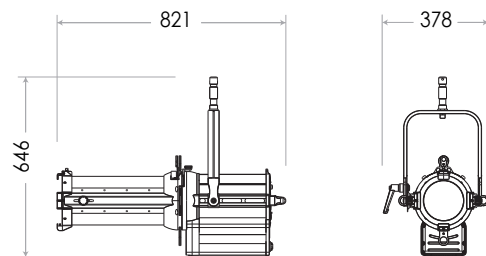

### HISTOGRAM



5600K



3200K