SL 50B

LED CCT PANEL

LAMPHEAD CONTENTS

- Lamp Housing
- Diffuser
- Stirrup with Ø16mm (5/8 in.) Socket
- Power Supply & Power Cable

SL PANEL 50B

Power Supply & Power Cable

SPECIFICATIONS

Identity No.	L0005BSL
Max. Capacity	40W
Voltage	12 - 24V DC
Current	2A @ 24V
Color Temp. Range	3200K - 5600K
CRI	Average >95
TLCI	Average >95
Dimming Range	0-100%
Control Signal	DMX 512
DMX Channel	2
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	with Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60 °C
Max. Ambient Temp.	45 °C
Operating Range	+90° ~ 0° ~ -90°
Weight (Lamphead)	3 kg

POWER SUPPLY

Capacity	60W
Inout	100 - 240 AC
Output	18V DC 3.33A

ACCESSORIES

- 4-leaf Barndoor
- V-mount Battery
- Safety Cable (for lamphead)

DIMENSIONS (mm)

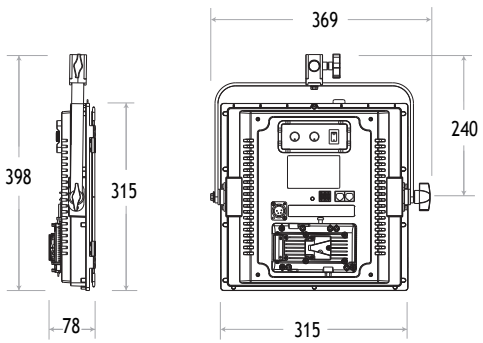

FILM GEAR INT. reserves the right to change or alter any of the items detailed on this page, to increase or improve manufacturing techniques without prior notice. @ 20210601

Film Gear (International) Ltd. No.7, Cumberland Road, Kowloon Tong, Hong Kong (852) 2794 3608 (852) 2794 3662 info@filmgear.net
Film Gear USA Group 9528 East Rush Street, Suite A South El Monte, CA 91733, U.S.A 1-323-780-8880 joanna@filmgearusa.com
www.filmgear.net

PHOTOMETRIC DATA

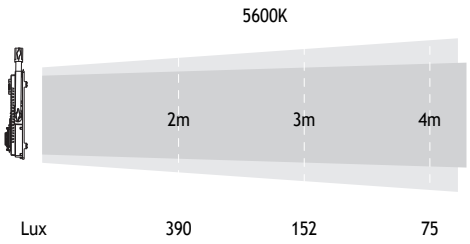

Lux	390	152	75

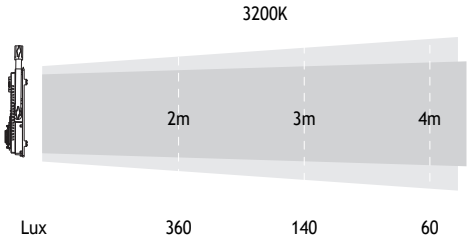

Lux	360	140	60

SPECTRUM



5600K



3200K

HISTOGRAM



5600K



3200K

POWER SUPPLY

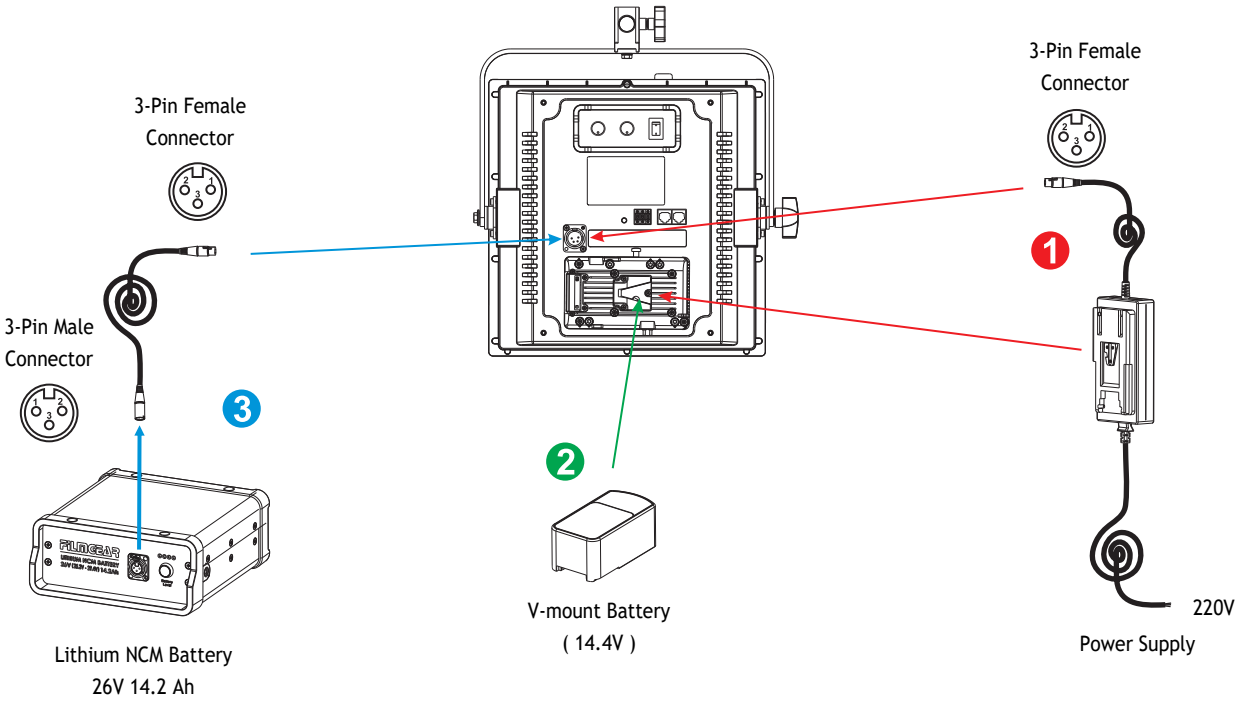

FILM GEAR INT. reserves the right to change or alter any of the items detailed on this page, to increase or improve manufacturing techniques without prior notice. @ 20210601

Film Gear (International) Ltd. No.7, Cumberland Road, Kowloon Tong, Hong Kong (852) 2794 3608 (852) 2794 3662 info@filmgear.net
Film Gear USA Group 9528 East Rush Street, Suite A South El Monte, CA 91733, U.S.A 1-323-780-8880 joanna@filmgearusa.com
www.filmgear.net